

526 Rec'd PCT/PTO 12 JUL 2001

SUBSTITUTE FORM PTO-1390

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

08846-084001

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If Known, see 37 CFR 1.5)

09/889193

INTERNATIONAL APPLICATION NO.
PCT/EP00/01275INTERNATIONAL FILING DATE
15 February 2000PRIORITY DATE CLAIMED
15 February 1999TITLE OF INVENTION
CEMENT ADDITIVE

APPLICANT(S) FOR DO/EO/US

Minoru YAGUCHI, Hidenori NAGAMINE, Keita KANEI

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☐ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 16 below concern other documents or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
 - ☒ Copy of the application, including amendments per PCT Article 34
 - ☒ Copy of the International Preliminary Examination Report, including amended pages 4, 6, 15

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EF 353 807 049 US

I hereby certify under 37 CFR § 1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, Washington, D.C. 20231

July 12-2001
Date of DepositFrankie Rehl
SignatureFrankie Rehl
Typed Name of
Person Signing

U.S. APPLICATION NO. (IF KNOWN) 09/889193		INTERNATIONAL APPLICATION NO. PCT/EP00/01275		ATTORNEY'S DOCKET NUMBER 08846-084001	
17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1000 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$860 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$710 International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ... \$690 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100 <div style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</div>				CALCULATIONS PTO USE ONLY	
				ENTER APPROPRIATE BASIC FEE AMOUNT =	
				ENTER APPROPRIATE BASIC FEE AMOUNT =	
Surcharge of \$130 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$130.00	
Claims	Number Filed	Number Extra	Rate		
Total Claims	16 - 20 =	0	x \$18	\$0.00	
Independent Claims	1 - 3 =	0	x \$80	\$0.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$270	\$0.00	
TOTAL OF ABOVE CALCULATIONS =				\$990.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$0.00	
SUBTOTAL =				\$990.00	
Processing fee of \$130 for furnishing the English Translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$0.00	
TOTAL NATIONAL FEE =				\$990.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$0.00	
TOTAL FEES ENCLOSED =				\$990.00	
				Amount to be refunded:	\$
				Charged:	\$990.00
a. <input checked="" type="checkbox"/> A check in the amount of \$990.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 06-1050 in the amount of \$0.00 to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 06-1050. A duplicate copy of this sheet is enclosed.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Andrew N. Parfomak FISH & RICHARDSON P.C. 45 Rockefeller Plaza, Suite 2800 New York, NY 10111 (212) 765-5070 phone (212) 258-2291 facsimile			12. July. 2001 <i>Andrew N. Parfomak</i> SIGNATURE : NAME Andrew N. Parfomak REGISTRATION NUMBER 32,431		

09/889193

Attorney's Docket No.: 08846-084001 / MBJ-0361

JC18 Rec'd PCT/PTO 1 2 JUL 2001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : YAGUCHI et al.
 Serial No. : PCT/EP00/01275
 Filed : February 15, 2000
 Title : CEMENT ADDITIVE

Art Unit : Unknown
 Examiner : Unknown

Commissioner for Patents
 Washington, D.C. 20231
 BOX PCT

PRELIMINARY AMENDMENT


Prior to examination, prior to the calculation of the filing fee for this application, please amend the application as follows:

In the claims:

Please cancel claim 10, without prejudice.

Please amend claim 3 through 9, and 11 as follows:

3.(Amended) A cement additive according to claim 1, wherein the monomer (A) is a compound according to general formula (1):



(1)

"EXPRESS MAIL" Mailing Label Number EF 353807049 US

Date of Deposit

12 July 2001


I hereby certify under 37 CFR 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office To Addressee" with sufficient postage on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Francisco Royler

Francisco Royler


wherein R^1 , R^2 and R^3 are each independently hydrogen or methyl, provided that not all are methyl; R^4 is $-\text{CH}_2\text{O}-$, $-(\text{CH}_2)_2\text{O}-$, $-\text{C}(\text{CH}_3)_2\text{O}-$ or $-\text{O}-$; the total carbon number of R^1 , R^2 , R^3 and R^4 is 3; $R^5\text{O}$ is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or more species, may be block or random; R^6 is hydrogen or a C_1 - C_{22} alkyl, phenyl or C_1 - C_{18} alkylphenyl group; p is an integer from on average 1 to 100,

the monomer (B) is a compound according to general formula (2):

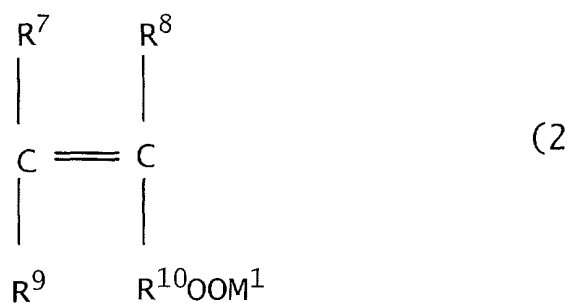

wherein R^7 and R^8 are each independently hydrogen or methyl; R^9 is hydrogen, methyl or $-(\text{CH}_2)_q\text{COOM}^2$; R^{10} is $-(\text{CH}_2)_r-$; q and r are each independently an integer from 0 to 2; M^1 and M^2 are a monovalent metal, a divalent metal, ammonium or an organic amine;


the monomer (C) is a compound according to general formula (3):

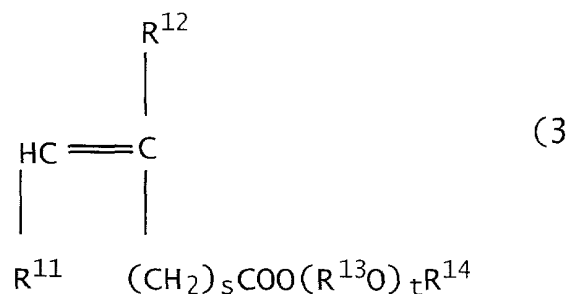

wherein R^{11} and R^{12} are each independently hydrogen, methyl or $(\text{CH}_2)_u\text{COOM}^3$, u is an integer from 0 to 2, M^3 is a monovalent metal, a divalent metal, ammonium or an organic amine; $R^{13}\text{O}$ is

one or more species of C₂-C₄ oxyalkylene groups, and, in the case of two or more species, may be block or random; R¹⁴ is a C₁-C₂₂ hydrogen or an alkyl, phenyl or C₁-C₂₂ alkylphenyl group; s is an integer from 0 to 2; t is an integer an average from 1 to 300; and

the monomer (D) is a compound according to the following general formula (4):

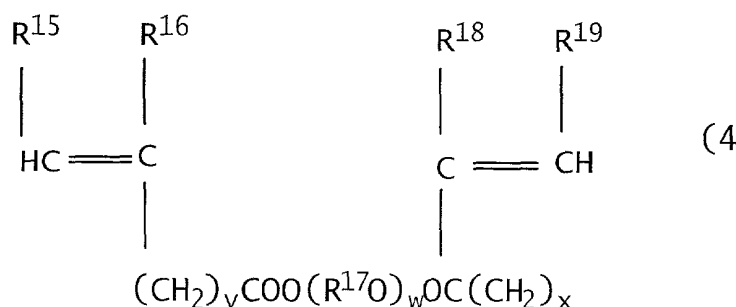

wherein R¹⁵, R¹⁶, R¹⁸ and R¹⁹ are each independently hydrogen or methyl, provided that not all are methyl; R¹⁷O is one or more species of C₂-C₄ oxyalkylene groups, and, in the case of two or more species, may be block or random; w is an integer an average from 1 to 300; v and x are each independently an integer from 0 to 2.

4.(Amended) A cement additive according to claim 1 wherein the composition ratios of the monomers (A) and (B) in the polycarboxylic acid type copolymer are 30-100 mole % based on the total mole amount of their monomers, and the average molecular weight of said polycarboxylic acid type copolymer is from 3,000 to 100,000.

5.(Amended) A cement additive according to claim 1, wherein the average molecular weight of the polyalkylene glycol derivative is from 1,000 to 100,000, and in which the alkylene is one or more C₂-C₄ species, and the terminal group of the polyalkylene glycol is hydrogen, a C₁-C₁₈ alkyl group or a phenyl group.

6.(Amended) A cement additive according claim 1, containing 100 weight parts of the

polycarboxylic acid type copolymer and 10-50 weight parts of the polyalkylene glycol derivative in the mixing proportion.

7.(Amended) A cement additive according to claim 1 , wherein the amount used in a cementitious composition is such that the amount of polycarboxylic acid type copolymer to cement is 0.05-1.0 % by weight based on the weight of cement, and the amount of the polyalkylene glycol derivative to cement is 0.005-0.5 % by weight based on the weight of cement.

8.(Amended) A high strength concrete mix, comprising a cement additive according to claim 1 .

9. (Amended) A concrete mix for the production of articles by steam curing, comprising a cement additive according to claim 1 .

11. (Amended) A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to claim 1 .

Please add new claims 12 - 17.

12. A high strength concrete mix, comprising a cement additive according to claim 2.

13. A high strength concrete mix, comprising a cement additive according to claim 3.

14. A concrete mix for the production of articles by steam curing, comprising a cement additive according to claim 2.

15. A concrete mix for the production of articles by steam curing, comprising a cement additive according to claim 3.

Applicant : MBT Holding AG
Serial No. :
Filed :
Page : 5

Attorney's Docket No.: 08846-084001 / MBJ-0361

16. A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to claim 2.

17. A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to claim 3.

08846-084001 / MBJ-0361

Applicant : MBT Holding AG
Serial No. :
Filed :
Page : 6

Attorney's Docket No.: 08846-084001 / MBJ-0361

REMARKS

Please enter the changes to the claims as entered herein. The claims have been amended to cast them into a form more amenable to US practice. New claims 12 – 17 have been added as further dependent claims and are addressed to certain embodiments of the invention as filed.

Attached is a marked-up version of the changes being made by the current amendment.

Applicant asks that all claims be examined. Please apply any other charges necessary for the entry of these amended claims, or issue credits to Deposit Account No. 06-1050.

Respectfully submitted,

Date: 12 July 2001

Andrew N. Parfomak
Andrew N. Parfomak
Reg. No. 32,431

Fish & Richardson P.C.
45 Rockefeller Plaza, Suite 2800
New York, NY 10111
Telephone: (212) 765-5070
Facsimile: (212) 258-2291

30059262 doc


Version with markings to show changes made

In the claims:

Claim 10 has been cancelled.


Claims 3 – 11 have been amended as follows:

3.(Amended) A cement additive according to claim 1 [or 2], wherein the monomer (A) is a compound according to general formula (1):

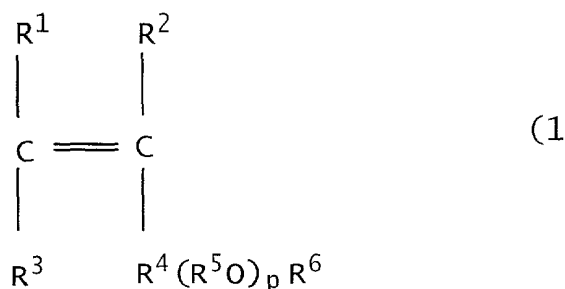


wherein R^1 , R^2 and R^3 are each independently hydrogen or methyl, provided that not all are methyl; R^4 is $-\text{CH}_2\text{O}-$, $-(\text{CH}_2)_2\text{O}-$, $-\text{C}(\text{CH}_3)_2\text{O}-$ or $-\text{O}-$; the total carbon number of R^1 , R^2 , R^3 and R^4 is 3; R^5O is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or more species, may be block or random; R^6 is hydrogen or a C_1 - C_{22} alkyl, phenyl or C_1 - C_{18} alkylphenyl group; p is an integer from on average 1 to 100,

the monomer (B) is a compound according to general formula (2):

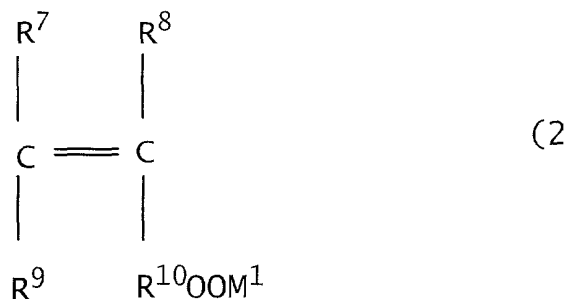


wherein R^7 and R^8 are each independently hydrogen or methyl; R^9 is hydrogen, methyl or $-(CH_2)_qCOOM^2$; R^{10} is $-(CH_2)_r-$; q and r are each independently an integer from 0 to 2; M^1 and M^2 are a monovalent metal, a divalent metal, ammonium or an organic amine;

the monomer (C) is a compound according to general formula (3):

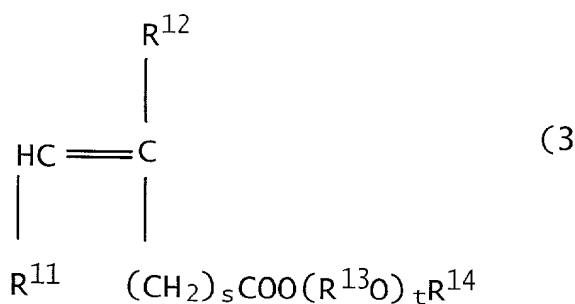

wherein R^{11} and R^{12} are each independently hydrogen, methyl or $(CH_2)_uCOOM^3$, u is an integer from 0 to 2, M^3 is a monovalent metal, a divalent metal, ammonium or an organic amine; $R^{13}O$ is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or more species, may be block or random; R^{14} is a C_1 - C_{22} hydrogen or an alkyl, phenyl or C_1 - C_{22} alkylphenyl group; s is an integer from 0 to 2; t is an integer an average from 1 to 300; and

the monomer (D) is a compound according to the following general formula (4):

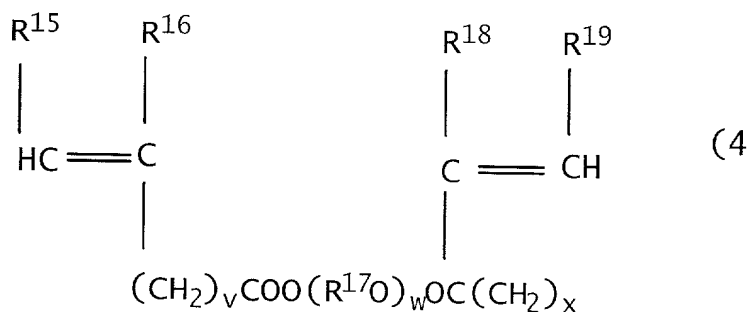

wherein R^{15} , R^{16} , R^{18} and R^{19} are each independently hydrogen or methyl, provided that not all are methyl; $R^{17}O$ is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or

more species, may be block or random; w is an integer an average from 1 to 300; v and x are each independently an integer from 0 to 2.

4.(Amended) A cement additive according to claim 1 [any one of claims 1-3,] wherein the composition ratios of the monomers (A) and (B) in the polycarboxylic acid type copolymer are 30-100 mole % based on the total mole amount of their monomers, and the average molecular weight of said polycarboxylic acid type copolymer is from 3,000 to 100,000.

5.(Amended) A cement additive according to claim 1 [any one of claims 1-3], wherein the average molecular weight of the polyalkylene glycol derivative is from 1,000 to 100,000, and in which the alkylene is one or more C₂-C₄ species, and the terminal group of the polyalkylene glycol is hydrogen, a C₁-C₁₈ alkyl group or a phenyl group.

6.(Amended) A cement additive according claim 1 [to any one of claims 1-5], containing 100 weight parts of the polycarboxylic acid type copolymer and 10-50 weight parts of the polyalkylene glycol derivative in the mixing proportion.

7.(Amended) A cement additive according to claim 1 [any one of claims 1-6], wherein the amount used in a cementitious composition is such that the amount of polycarboxylic acid type copolymer to cement is 0.05-1.0 % by weight based on the weight of cement, and the amount of the polyalkylene glycol derivative to cement is 0.005-0.5 % by weight based on the weight of cement.

8.(Amended) A high strength concrete mix, comprising a cement additive according to claim 1 [any one of claims 1-7.]

9. (Amended) A concrete mix for the production of articles by steam curing, comprising a cement additive according to claim 1 [any one of claims 1-7.]

10. Canceled

11. (Amended) A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to claim 1 [any one of claims 1-7.]

The following new claims have been added

12. A high strength concrete mix, comprising a cement additive according to claim 2.

13. A high strength concrete mix, comprising a cement additive according to claim 3.

14. A concrete mix for the production of articles by steam curing, comprising a cement additive according to claim 2.

15. A concrete mix for the production of articles by steam curing, comprising a cement additive according to claim 3.

16. A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to claim 2.

17. A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to claim 3.

Cement Additive

5 This invention relates to a cement additive and more particularly, to a cement additive used to improve the fluidity and appearance of strength of cement slurry, cement paste, mortar and concrete.

10 Various cement additives comprising polycarboxylic acid type copolymers have been proposed for enhancing the fluidity and flowability of concrete. While this works well for ordinary concretes, it is not so effective when high strength and high durability are required, as such copolymers tend to entrain an excess of air and retard setting.

15 In relation to pre-formed concrete products, it is strongly desired to decrease the total time spent in a form and to prevent defects when the form is removed. For such products, good appearance is also highly desirable, when the form is removed after steam curing. Various polycarboxylate materials to achieve this have been proposed, but none have been entirely satisfactory, causing such problems as retarded setting and low fluidity.


20 It has now been found that a cement additive containing a polycarboxylic acid type copolymer and a polyalkylene glycol derivative having a specific molecular structure can alleviate and sometimes completely remove all the above-mentioned problems, by having a high dispersing ability for various concretes, improving and retaining the fluidity of concrete, and also making it possible to increase the strength of pre-formed concrete, such that form removal after steam curing can be carried out relatively early, giving a product with low aeration.

25 The invention therefore provides a cement additive containing a polycarboxylic acid type copolymer and/or the salts thereof and a polyalkylene glycol derivative, said polycarboxylic acid type copolymer contains at least one species of copolymer, the monomers of which copolymer comprise at least an unsaturated polyalkylene glycol type monomer (A) and an unsaturated mono- or dicarboxylic acid type monomer (B).

The invention also relates to a cement additive, wherein the polycarboxylic acid type copolymers are copolymers which additionally include as monomer components an

unsaturated polyalkylene glycol ester type monomer (C) and/or a monomer (D) polymerizable with the above-mentioned monomers (A) and (B), or with the monomers (A), (B) and (C).


- 5 The invention further relates to the above-mentioned cement additive, wherein the monomer (A) is a compound according to the general formula (1):

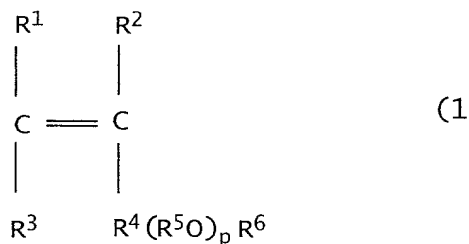

- 10 wherein R^1 , R^2 and R^3 are each independently hydrogen or methyl, provided that not all are methyl; R^4 is $-\text{CH}_2\text{O}-$, $-(\text{CH}_2)_2\text{O}-$, $-\text{C}(\text{CH}_3)_2\text{O}-$ or $-\text{O}-$; the total carbon number of R^1 , R^2 , R^3 and R^4 is 3; $R^5\text{O}$ is one or more species of C_2 - C_4 oxyalkylene groups, and in the case of two or more species may be block or random; R^6 is hydrogen or a C_1 - C_{22} alkyl, phenyl or C_1 - C_{18} alkylphenyl group; p is an integer from on average 1 to 100;


15

the monomer (B) is a compound according to the general formula (2):

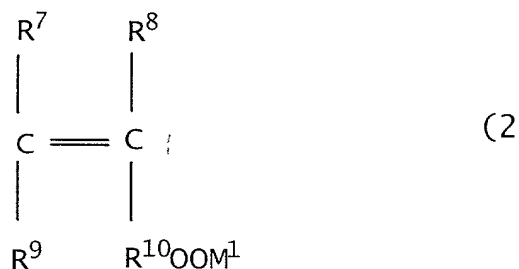

- 20 wherein R^7 and R^8 are each independently hydrogen or methyl; R^9 is hydrogen, methyl or $-(\text{CH}_2)_q\text{COOM}^2$; R^{10} is $-(\text{CH}_2)_r-$; q and r are each independently an integer from 0 to 2; M^1 and M^2 are a monovalent metal, a divalent metal, ammonium or an organic amine;


the monomer (C) is a compound according to the general formula (3):

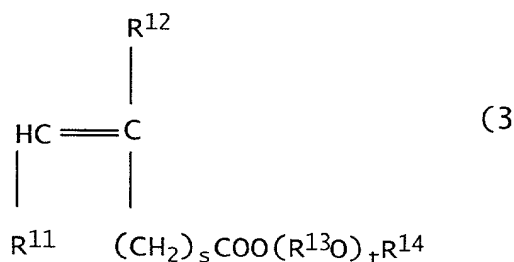

- 5 wherein R^{11} and R^{12} are each independently hydrogen, methyl or $(\text{CH}_2)_u\text{COOM}^3$, u is an integer from 0 to 2, M^3 is a monovalent metal, a divalent metal, ammonium or an organic amine; R^{13}O is one or more species of C_1 - C_4 oxyalkylene groups, and in the case of two or more species may be block or random; R^{14} is hydrogen or a C_1 - C_{22} alkyl, phenyl or C_1 - C_{22} alkylphenyl group; s is an integer from 0 to 2; t is an integer an average from 1 to 300; and

10

the monomer (D) is a compound according to the general formula (4):

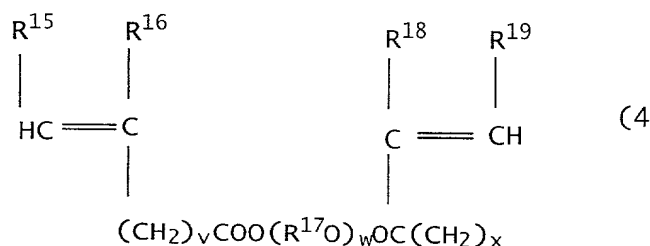

- 15 wherein R^{15} , R^{16} , R^{18} and R^{19} are each independently hydrogen or methyl, provided that not all are methyl; R^{17}O is one or more species of C_2 - C_4 oxyalkylene groups, and in the case of two or more species may be block or random; w is an integer an average from 1 to 300; v and x are each independently an integer from 0 to 2.

20

The invention also relates to the abovementioned cement additive, wherein the composition ratios of the monomers (A) and (B) in the polycarboxylic acid-type copolymers are 30-100 mole % based on the total mole amount of the monomers, and the average molecular weight of said polycarboxylic acid-type copolymer is from 3,000-

100,000 (all molecular weights (MW) referred to herein were measured by gel permeation chromatography with polyethylene glycol as standard).

5 The invention also relates to the abovementioned cement additive, wherein the average molecular weight of the polyalkylene glycol derivatives is from 1,000-100,000, in which the alkylene is one or more C_2-C_4 species, and the terminal groups of the polyalkylene glycol is hydrogen or a C_1-C_{18} alkyl or phenyl group.

10 Further, the invention relates to the abovementioned cement additive containing 100 weight parts of the polycarboxylic acid type copolymers and 10-50 weight parts of the polyalkylene glycol derivatives.

15 Also, the invention relates to the abovementioned cement additive, wherein the amount of the polycarboxylic acid type copolymers added to cement is 0.05-1.0 % by weight based on the weight of cement, and the amount of the polyalkylene glycol derivatives added to cement is 0.005-0.5 % by weight based on the weight of cement.

20 Further, the invention relates to use of the abovementioned cement additive in high strength concrete.

The invention also relates to the use of the abovementioned cement additive in the formation of pre-formed concrete articles by steam curing.

25 The invention further provides a method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive as hereinabove described.

30 The invention further provides a method of preparation of a concrete mix adapted to be used for the manufacture of articles by steam curing, comprising the incorporation in the mix of a cement additive as hereinabove described.

In a cement additive according to the invention, the monomers (A) are typically compounds according to the abovementioned general formula (1), more specifically, the

compounds in which 1-100 mole of an alkylene oxide is added to an unsaturated alcohol such as 3-methyl-2-buten-1-ol, 3-methyl-3-buten-1-ol, 2-methyl-3-buten-2-ol. One or more species of unsaturated alcohol may be used.

- 5 Examples of monomers (B) include compounds according to general formula (2), more specifically, for example, acrylic acid, methacrylic acid, crotonic acid, maleic acid, fumaric acid, itaconic acid and citraconic acid. One or more species of these may be used.

- 10 Monomers (C) are typically compounds according to general formula (3). Specific examples include unsaturated polyalkylene glycol monoester type monomers such as polyethylene glycol monoesters, polypropylene oxide monoesters, monoesters of polyethylene glycol/polypropylene oxide copolymers, derivatives in which a terminal hydrogen of these glycols is etherified, and the like, such as triethylene glycol monoacrylate, polyethylene glycol (MW 200) monoacrylate, polyethylene glycol (MW 400) monoacrylate, polyethylene glycol (MW 600) monoacrylate, polyethylene glycol (MW 1000) monoacrylate, polyethylene glycol (MW 2000) monoacrylate, polyethylene glycol (MW 4000) monoacrylate, polyethylene glycol (MW 6000) monoacrylate, triethylene glycol monomethacrylate, polyethylene glycol (MW 200) monomethacrylate, polyethylene glycol (MW 400) monomethacrylate, polyethylene glycol (MW 600) monomethacrylate, polyethylene glycol (MW 1000) monomethacrylate, polyethylene glycol (MW 2000) monomethacrylate, polyethylene glycol (MW 4000) monomethacrylate and polyethylene glycol (MW 6000) monomethacrylate. and one or more species of these may be used.

- 25 The monomers (D) are typically compounds according to general formula (4), specific examples including unsaturated polyalkylene glycol diester type monomers and/or styrene, styrenesulfonic acid and/or the salts thereof, acrylic acid alkyl esters (alkyl of C₂₂ maximum), methacrylic acid alkyl ester (alkyl of C₂₂ maximum), maleic anhydride, maleic acid monoesters (alkyl of C₂₂ maximum), and/or alkylene glycol of C₃ maximum and 1-300 alkylene glycol units, maleic acid diester (alkyl of C₂₂ maximum and /or alkylene glycol of C₃ maximum and 1-300 alkylene glycol units, vinyl acetate, acrylamide and acrylamide methylpropanesulfonic acid and/or the salts thereof.

Specific examples include styrene, styrenesulfonic acid and/or the salts thereof, acrylic acid methyl ester, acrylic acid ethyl ester, acrylic acid butyl ester, methacrylic acid methyl ester, methacrylic acid ethyl ester, methacrylic acid butyl ester, maleic anhydride, maleic acid methyl monoester, maleic acid ethyl monoester, maleic acid methyl diester, maleic acid ethyl diester, vinyl acetate, acrylamide, acrylamide methylpropansulfonic acid and/or the salts thereof, methallyl sulfonic acid and/or the salts thereof. One or more species of these may be used.

Specific non-limiting examples of polycarboxylic acid type copolymers are those described in JP, A, H5-306152, JP, A, H6-211949, JP, A, H9-286647 and JP, A, H10-236858.

The composition ratio of the monomers (A) and (B) in the polycarboxylic acid type copolymers in the invention to total amount of the monomers is preferably 30-100 mole %, and the average molecular weight is preferably 3,000-100,000.

In the polyalkylene glycol derivatives of the invention, the average molecular weight is 1,000-150,000, preferably 1,000-100,000, more preferably 4,000-50,000, the alkylene is one or more C₂-C₄ species, and it may be block or random in the case of 2 or more species, the terminal groups of polyalkylene glycol are hydrogen, C₁₈ maximum alkyl or phenyl groups.

In a cement additive of the invention, the preferred proportions are 100 weight parts of polycarboxylic acid type copolymers and 10-50 weight parts of polyalkylene glycol derivatives.

A cement additive of the invention is preferably used in such a quantity that polycarboxylic acid type copolymers are present in the proportion 0.05-1.0 % by weight based on cement weight and polyalkylene glycol derivatives are present in the proportion 0.005-0.5 % by weight based on cement weight. However, the amount of the cement additive according to the invention to be used can be appropriately determined according to a cement composition used, it basically being the amount which is necessary to attain the desired strength development and improved time to form removal after steam curing,

and it is possible that suitable proportions outside these limits may be found.

5 A cement additive according to the invention may be used for stiff consistency concrete, plastic concrete, high fluidity concrete, high strength concrete, cement paste as generally used, mortar, grout, concrete and the like, although the beneficial effects of the invention are most noticeable in high strength concrete in which the water/cement ratio is low.

10 A cement additive according to the invention may be mixed, if desired, with other additives to expand its versatility. Typical examples of other additives are conventional water-reducing agents (lignosulfonate, oxycarboxylate, polyalkylsulfonate, polycarboxylate), air content-regulating agents, drying shrinkage reducing agents, accelerators, retarders, foaming agents, anti-foaming agents, anti-rust agents, set acceleration agents, high early-strengthening agents, efflorescence-inhibiting agents, 15 bleeding inhibitors, pumping aids, and water-soluble polymers.

A cement additive according to the invention exhibits a high dispersing ability of a degree never obtained by use only of polycarboxylic acid-type copolymers to various concretes such as ordinary concrete, high strength concrete and steam curing concrete. 20 Without restricting the scope of the invention in any way, it is believed that this is the result of a synergistic effect of the polycarboxylic acid type copolymers and the polyalkylene glycol derivatives. It both enhances the fluidity of concrete and maintains this fluidity, thereby making it possible to increase the strength development and decrease the time for form removal after steam curing. The latter is particularly valuable in that it 25 permits economies such as the reduction of time spent in a form used and the reduction of defects in concrete products manufactured in a concrete factory.

The invention is now further illustrated by the following non-limiting examples wherein are used the cement additives containing polycarboxylic acid type copolymers and 30 polyalkylene glycol derivatives according to the invention.

Examples

The compositions of the polycarboxylic acid type copolymers in the cement

additives used in the examples and in the comparative examples are shown in Table 1. Said polycarboxylic acid type copolymers can be obtained by known polymerization methods described in, for example, JP, A, H5-306152, JP, A, H6-211949, JP, A, H9-286647 and JP, A, H10-236858. The polyalkylene glycol derivatives in the

5 additives used in the examples and in the comparative examples are also shown in Table 2.

In order to illustrate the effect of these cement additives, the concrete compositions (shown in Table 3) are designed to have slump of 18.5 ± 1 cm and air content 4.5%. The

10 total quantity of materials in each case is 80 litres, and all the materials are added to a 100 litre pan-type forced mixing mixer, and mixed for 120 sec. to give the concrete compositions. The concrete compositions thus obtained are measured for slump, air content, setting time and compressive strength. Further, the compressive strength in the case of accelerating the appearance of strength by steam curing was measured.

- 15
- 1) Slump: measured according to JIS A 1101,
 - 2) Air content: measured according to JIS A 1128,
 - 3) Setting time: measured according to JIS A 6204 Supplement 1,
 - 4) Compressive strength

20 Ordinary curing: measured according to JIS A 1108,

Steam curing: the sample is pre-cured at 20°C for 2 hr, then warmed to 65°C in 2 hrs 30 min, kept at 65°C for 4 hrs. After allowing to cool to 20°C over 4 hrs, the testing is carried out according to JIS A 1108.

25 (Materials used)

Mixing water: tap water.

Cement: ordinary portland cement (density 3.16 g/cm^3).

Fine aggregate: Oi River pit sand (specific gravity 2.59, FM=2.74),

Coarse aggregate: Oume crushed stone (specific gravity 2.65, MS[median size?]=20mm).

30

The results of the above measurement are shown in Table 4. In the Table, the examples 1-13 and the comparative examples 1-4 are for the results obtained from the ordinary cement, and the examples 14, 15 and the comparative examples 5, 6 are those

obtained from the high strength concrete.

The examples 1-7 show the cases in which the type of the polycarboxylic acid type copolymers is changed, and the examples 1 and 8-13 are the cases in which the type of the polyalkylene glycol derivatives is changed.

The comparative examples 1 and 5 show the cases in which a polyalkylene glycol derivative is not used, and the comparative examples 2-4 and 6 are the cases in which compounds other than the polycarboxylic acid type copolymers in the invention are used.

As is evident from the comparison between the comparative example 1 and the examples 1-13, and from the comparison between the comparative example 5 and the examples 14 and 15, the ordinary concrete and the high strength concrete, in which the cement additives together with the polyalkylene glycol derivatives of the invention are used, both show a tendency to accelerate setting, whereby the slump values are large (fluidity) and their slump lowering over 60 min is small (high flowability), demonstrating a preferable compressive strength both for ordinary curing and steam curing.

The comparative examples 2-4 and 6 are those in which compounds other than the polycarboxylic acid type copolymers in the invention are used, though in these examples the development of compressive strength is not sufficient, because there is demonstrated a retardation of setting.

Table 1

Type of Polycarboxylic Acid-type copolymer	Type of monomer and composition ratio											Average Molecular Weight
	Monomer (A)			Monomer (B)			Monomer (C)			Monomer (D)		
	Mole ratio (%)	Type	AG No.	Mole ratio (%)	Type	Mole ratio (%)	Mole ratio (%)	Type	AG No.	Mole ratio (%)	Type	
PCA-1	1.5	Polyethylene glycol mono-vinyl ether	50	1	Maleic acid	-	-	-	-	-	-	20000
PCA-2	1.5	2-Methyl 2-propen-1-ol alkylene oxide adduct	50	1	Maleic acid	-	-	-	-	-	-	30000
PCA-3	1.5	Polyethylene glycol mono-vinyl ether	50	1	Maleic acid	0.2	-	Polyethylene glycol maleic acid ester	75	-	-	35000
PCA-4	1.5	Polyethylene glycol polypropylene glycol allyl ether	50	1	Maleic acid	0.3	-	Polyethylene glycol maleic acid ester	25	0.1	Maleic anhydride	24000
PCA-5	1.5	Polyethylene glycol allyl ether	12	1	Maleic acid	-	-	-	-	0.2	Styrene	32000
PCA-6	1.5	2-Methyl 2-propen-1-ol alkylene oxide adduct	25	1	Acrylic acid	-	-	-	-	0.2	Acrylamide methylpropan sulfonic acid	27000
PCA-7	1.5	2-Methyl 2-propen-1-ol alkylene oxide adduct	75	1	Acrylic acid	-	-	-	-	0.2	Polyethylene glycol dimethacrylic acid ester	75000
P-1	1	2-Methyl 2-propen-1-ol alkylene oxide adduct	50	1	Maleic acid	2	-	Polyethylene glycol maleic acid ester	25	-	-	30000
P-2	1	Polyalkylene glycol monovinyl ether	50	1	Maleic acid	2	-	Polyethylene glycol methacrylic acid ester	25	-	-	28000
P-3	-	-	-	1	Acrylic acid	2	-	Polyethylene glycol methacrylic acid ester	100	-	-	28000

Table 2

Sample mark	Component name of polyalkylene glycol	Average molecular weight
PAG-1	Polyethylene glycol	4000
PAG-2	Polyethylene glycol	6000
PAG-3	Polyethylene glycol	10000
PAG-4	Polyethylene glycol	20000
PAG-5	Polyethylene glycol	50000
PAG-6	Polyethylene glycol-polypropylene glycol block polymer	4000
PAG-7	Polyethylene glycol oleic acid ester	5000

5 Table 3 (Blend)


Type of Concrete	W/C (%)	s/a (%)	Unit amount (Kg/m ³)			
			W	C	S	G
Ordinary Concrete	50	46	160	320	823	993
High-strength concrete	35.6	44	160	450	741	968

Table 4 (Concrete test)

	Type of blend	No.	Polycarboxylic acid type copolymer		PAG		Slump (cm)		Air content (%)		Setting time (min)		Compressive strength (N/mm ²)	
			Type	Amount added (wt%)	Type	Amount added (wt%)	Just after	60 min later	Just after	60 min later	Start	End	Standard curing age 3 days	Steam curing age 7 hrs
Example	Ordinary Concrete	1	PCA-1	0.2	PAG-4	0.03	19.0	15.0	4.5	4.5	355	450	25.0	27.6
		2	PCA-2	0.2	PAG-4	0.03	18.5	16.0	4.4	4.4	350	450	25.4	27.9
		3	PCA-3	0.2	PAG-4	0.03	18.0	15.5	4.6	4.5	355	450	25.2	27.6
		4	PCA-4	0.2	PAG-4	0.03	18.5	19.0	4.4	4.5	355	460	24.5	27.1
		5	PCA-5	0.2	PAG-4	0.03	18.0	15.0	4.4	4.3	355	450	25.6	28.3
		6	PCA-6	0.2	PAG-4	0.03	18.0	15.0	4.6	4.5	355	450	25.2	27.4
		7	PCA-7	0.2	PAG-4	0.03	18.5	18.5	4.3	4.4	355	450	24.1	29.2
		8	PCA-1	0.2	PAG-1	0.05	18.0	15.0	4.2	4.3	355	450	25.2	28.4
		9	PCA-1	0.2	PAG-2	0.05	18.0	15.0	4.4	4.5	355	450	25.6	28.3
		10	PCA-1	0.2	PAG-3	0.05	18.5	15.0	4.5	4.6	355	450	25.4	28.3
		11	PCA-1	0.2	PAG-5	0.05	18.0	15.0	4.5	4.3	355	450	25.3	28.3
		12	PCA-1	0.2	PAG-6	0.03	18.5	15.0	4.6	4.4	355	450	26.7	28.4
		13	PCA-1	0.2	PAG-7	0.03	18.5	15.0	4.6	4.5	355	450	26.7	27.1
Comparative Example	High Strength Concrete	14	PCA-1	0.2	PAG-4	0.03	19.0	15.0	4.5	4.5	300	395	36.4	39.1
		15	PCA-2	0.2	PAG-4	0.03	18.5	16.0	4.4	4.4	305	390	36.2	39.0
	Ordinary Concrete	1	PCA-1	0.3	-	-	17.5	6.0	4.4	4.0	380	485	20.4	23.4
		2	P-1	0.2	PAG-4	0.05	18.5	14.5	4.3	5.7	355	450	22.4	23.5
		3	P-2	0.2	PAG-4	0.05	19.0	13.5	4.5	5.9	355	455	22.6	23.8
		4	P-3	0.2	PAG-4	0.05	18.5	14.0	4.5	5.9	380	470	22.7	23.5
	High strength concrete	5	PCA-1	0.3	-	-	13.0	6.0	4.4	4.0	340	495	31.0	35.2
		6	P-3	0.3	PAG-4	0.05	18.5	14.0	4.5	5.9	350	445	31.5	36.0


Claims

1. A cement additive comprising a polycarboxylic acid type copolymer and/or a salt thereof and a polyalkylene glycol derivative, wherein said polycarboxylic acid type copolymer contains at least one species of copolymer derived from at least an unsaturated polyalkylene glycol ether type monomer (A) and an unsaturated mono- or dicarboxylic acid type monomer (B) as its monomer component.
2. A cement additive according to claim 1, wherein the polycarboxylic acid type copolymer is additionally derived from an unsaturated polyalkylene glycol ester type monomer (C) and/or a monomer (D), which is copolymerizable with the above monomers (A) and (B), or with the monomers (A), (B) and (C).
3. A cement additive according to claim 1 or 2, wherein the monomer (A) is a compound according to general formula (1):

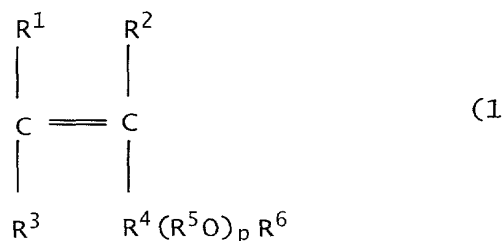


- wherein R^1 , R^2 and R^3 are each independently hydrogen or methyl, provided that not all are methyl; R^4 is $-\text{CH}_2\text{O}-$, $-(\text{CH}_2)_2\text{O}-$, $-\text{C}(\text{CH}_3)_2\text{O}-$ or $-\text{O}-$; the total carbon number of R^1 , R^2 , R^3 and R^4 is 3; $R^5\text{O}$ is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or more species, may be block or random; R^6 is hydrogen or a C_1 - C_{22} alkyl, phenyl or C_1 - C_{18} alkylphenyl group; p is an integer from on average 1 to 100,
- the monomer (B) is a compound according to general formula (2):

14

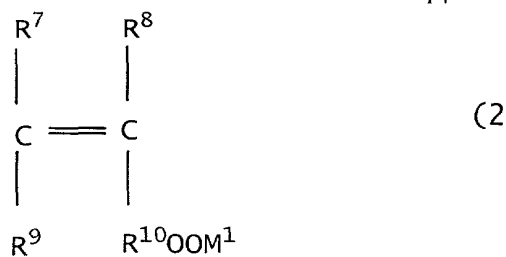

wherein R^7 and R^8 are each independently hydrogen or methyl; R^9 is hydrogen, methyl or $-(CH_2)_qCOOM^2$; R^{10} is $-(CH_2)_r-$; q and r are each independently an integer from 0 to 2; M^1 and M^2 are a monovalent metal, a divalent metal, ammonium or an organic amine;


the monomer (C) is a compound according to general formula (3):

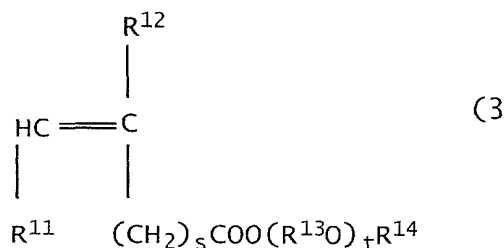

10

wherein R^{11} and R^{12} are each independently hydrogen, methyl or $(CH_2)_uCOOM^3$, u is an integer from 0 to 2, M^3 is a monovalent metal, a divalent metal, ammonium or an organic amine; $R^{13}O$ is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or more species, may be block or random; R^{14} is a C_1 - C_{22} hydrogen or an alkyl, phenyl or C_1 - C_{22} alkylphenyl group; s is an integer from 0 to 2; t is an integer an average from 1 to 300; and

the monomer (D) is a compound according to the following general formula (4):

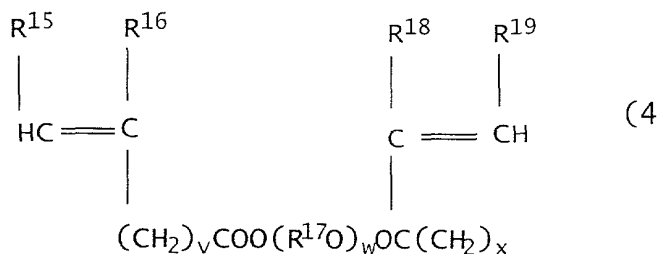

wherein R^{15} , R^{16} , R^{18} and R^{19} are each independently hydrogen or methyl, provided that not all are methyl; $R^{17}O$ is one or more species of C_2 - C_4 oxyalkylene groups, and, in the case of two or more species, may be block or random; w is an integer an average from 1 to 300; v and x are each independently an integer from 0 to 2.

4. A cement additive according to any one of claims 1-3, wherein the composition ratios of the monomers (A) and (B) in the polycarboxylic acid type copolymer are 30-100 mole % based on the total mole amount of their monomers, and the average molecular weight of said polycarboxylic acid type copolymer is from 3,000 to 100,000.

5. A cement additive according to any one of claims 1-3, wherein the average molecular weight of the polyalkylene glycol derivative is from 1,000 to 100,000, and in which the alkylene is one or more C_2 - C_4 species, and the terminal group of the polyalkylene glycol is hydrogen, a C_1 - C_{18} alkyl group or a phenyl group.

6. A cement additive according to any one of claims 1-5, containing 100 weight parts of the polycarboxylic acid type copolymer and 10-50 weight parts of the polyalkylene glycol derivative in the mixing proportion.

7. A cement additive according to any one of claims 1-6, wherein the amount used in a cementitious composition is such that the amount of polycarboxylic acid type copolymer to cement is 0.05-1.0 % by weight based on the weight of cement, and the amount of the polyalkylene glycol derivative to cement is 0.005-0.5 % by weight based on the weight of cement.

8. A high strength concrete mix, comprising a cement additive according to any one of claims 1-7.

9. A concrete mix for the production of articles by steam curing, comprising a cement additive according to any one of claims 1-7.

10. A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to any one of claims 1-7.

11. A method of preparation of a high-strength concrete mix, comprising the incorporation in the mix of a cement additive according to any one of claims 1-7.

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that.

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled CEMENT ADDITIVE, the specification of which:

- ☐ is attached hereto.
☐ was filed on _ as Application Serial No. _ and was amended on _____.
☒ was described and claimed in PCT International Application No. PCT/EP00/01275 filed on 15 February, 2000 and as amended under PCT Article 34.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim the benefit under Title 35, United States Code, §119(e)(1) of any United States provisional application(s) listed below:

U.S. Serial No.	Filing Date	Status

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information I know to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Serial No.	Filing Date	Status

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

Country	Application No.	Filing Date	Priority Claimed
Japan	11/35350	February 15, 1999	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
PCT	PCT/EP00/01275	February 15, 2000	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Andrew N. Parfomak, Reg. No. 32,431
 John B. Pegram, Reg. No. 25,198

Frederick H. Rabin, Reg. No. 24,488
 William J. Hone, Reg. No. 26,739

Combined Declaration and Power of Attorney

Page 2 of 7 Pages

Richard P. Ferrara, Reg. No. 30,632
Samuel Borodach, Reg. No. 38,388

Stephan J. Filipek, Reg. No. 33,384
Chris T. Mizumoto, Reg. No. 42,899

Address all telephone calls to ANDREW N. PARFOMAK at telephone number (212) 765-5070.

Address all correspondence to ANDREW N. PARFOMAK at:

FISH & RICHARDSON P.C.
45 Rockefeller Plaza, Suite 2800
New York, NY 10111

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

Full Name of Inventor: MINORU YAGUCHI

Inventor's Signature: Minoru Yaguchi
Residence Address: 2722, Hagizono, Chigasaki-shi, Kanagawa-ken
Citizenship: Japan
Post Office Address: 2722, Hagizono
Chigasaki-shi
Kanagawa-ken
JAPAN

Date: 25, Oct, 2001

Full Name of Inventor: HIDENORI NAGAMINE

Inventor's Signature: Hidenori Nagamine
Residence Address: 2722, Hagizono, Chigasaki-shi, Kanagawa-ken
Citizenship: Japan
Post Office Address: 2722, Hagizono
Chigasaki-shi
Kanagawa-ken
JAPAN

Date: 25, Oct. 2001

Full Name of Inventor: KEITA KANEI

Inventor's Signature: Keita Kanei
Residence Address: 2722 Hagizono, Chigasaki-shi, Kanagawa-ken
Citizenship: Japan
Post Office Address: 2722 Hagizono
Chigasaki-shi, Kanagawa-ken
Japan

Date: 25, Oct. 2001

Combined Declaration and Power of Attorney

Page 3 of 7 Pages

Full Name of Inventor: KEITA KANEI

Inventor's Signature: _____

Date: _____


Residence Address: 2722 Hagazono, Chigasaki-shi, Kanagawa-ken

Citizenship: _____

Post Office Address: 2722 Hagazono
Chigasaki-shi, Kanagawa-ken
Japan

30059411 doc

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

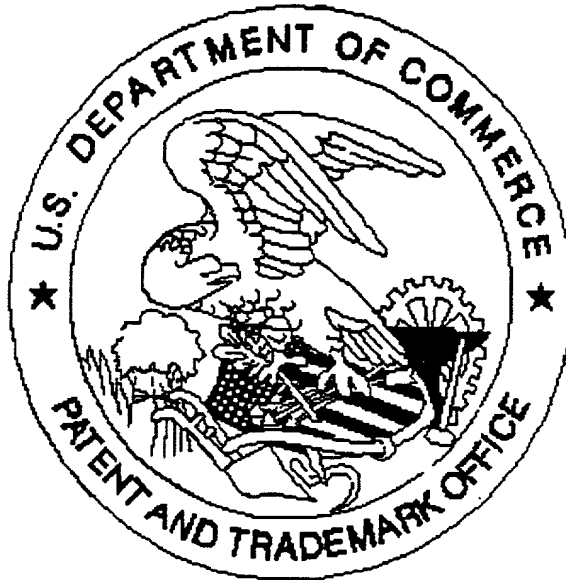

Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ **Scanned copy is best available.**

From 4 of 7 to 7 of 7 of
declaration were not
Present.